

Area of Application

ESSVE Wafer head screw with sharp point is intended for installing in sheet materials indoors against wood or steel joists, max 0.4-0.9 mm.


ted surface treatment and in different RAL colours. It is equipped with Philips crosshead Ph2.

Description

The screw is manufactured of hardened carbon steel with phosphated or bright zinc plated

Installation

Recommended rpm:
400-1200/min

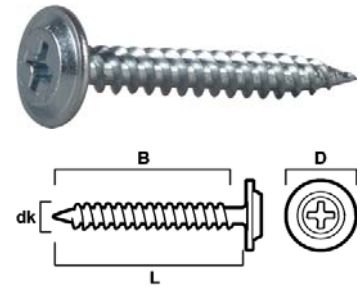

Specification

	Phosphated	Bright zinc plated	Painted	Dacro 500 hr
Material	Hardened steel SAE C1022	Hardened steel SAE C1022	Hardened steel SAE C1022	Hardened steel SAE C1022
Surface treatment	Phosphated	Bright zinc plated 5µm	Painted in different colours	Dacro 500 hr
Corrosion categories	C1	C1	C1	C3

Wafer head screw sharp point, for wood/steel joists, bright zinc plated

ESSBOX

Item no.	Dimension dk × L mm	D mm	B mm	Bit no	ESSBOX size	Qty/pack.	Pack./large pack.
572613	4,2 × 13	11,0	13,0	PH2	202	250	12
572113	4,2 × 13	11,0	13,0	PH2	204	1000	6
572616	4,2 × 16	11,0	16,0	PH2	202	250	12
572619	4,2 × 19	11,0	19,0	PH2	202	250	12
572625	4,2 × 25	11,0	25,0	PH2	202	250	12
572125	4,2 × 25	11,0	25,0	PH2	304	1000	4
572632	4,2 × 32	11,0	32,0	PH2	203	250	8
572133	4,2 × 32	11,0	32,0	PH2	304	800	4
572638	4,2 × 38	11,0	38,0	PH2	204	250	6
572645	4,2 × 45	11,0	45,0	PH2	204	250	6
572650	4,2 × 50	11,0	50,0	PH2	203	200	8
572151	4,2 × 50	11,0	50,0	PH2	304	400	4
572165	4,2 × 65	11,0	50,0	PH2	204	200	6
578175	4,8 × 75	11,0	50,0	PH2	304	200	4
575185	4,8 × 85	11,0	50,0	PH2	304	200	4
575100	4,8 × 100	11,0	50,0	PH2	304	200	4

Small package

Item no.	Dimension dk × L mm	D mm	B mm	Bit no	Qty/pack.	Pack./large pack.
513320	4,2 × 13	11,0	13,0	PH2	25	10
513322	4,2 × 25	11,0	25,0	PH2	25	10
513324	4,2 × 50	11,0	50,0	PH2	12	10
513326	4,8 × 75	11,0	50,0	PH2	20	10

