

Area of application


ESSVE Nail plate angle bracket is designed for different types of joining of framework structures. The bracket is available with different leg lengths and therefore extremely useful.

Description

Made of 2.5 mm hot dip galvanized sheet steel and fitted with 5.0 mm holes.

Installation


The nail plate angle bracket is installed with e.g. ESSVE Anchor nails 4.0 mm or ESSVE Wood connector screws 5.0 mm.

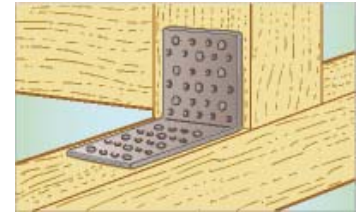

Specification

Material	Steel S250GD
Lower yield point, fyk	Min. 250 MPa
Surface treatment	Hot dip galvanized 20 µm
Corrosion category	C2
Nail hole Ø	5.0 mm

Nail plate angle bracket, hot dip galvanized

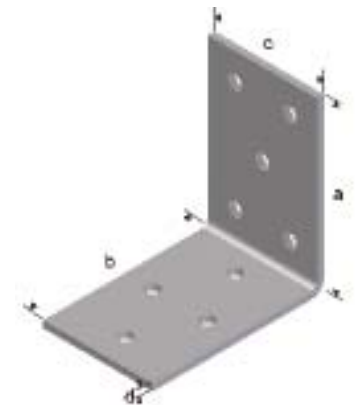

Item no.	Dimensions a x b x c x d mm	Hole Anchor nail/ Wood connector screw Quantity x Ø 5 mm	Hole/ leg	Qty/ pack.	Quantity / pallet	Item code
451586	40x40x60x2.5	10	5/5	100	8000	L
451589	40x60x60x2.5	12	5/7	100	8000	L
451592	60x60x40x2.5	12	6/6	100	4000	L
451595	60x60x60x2.5	21	10/11	100	8000	L
451598	60x60x80x2.5	27	13/14	50	2400	L
451601	60x80x60x2.5	18	8/10	100	6400	L
451604	80x80x40x2.5	12	6/6	100	6400	L
451607	80x80x60x2.5	20	10/10	100	6000	L
451610	80x80x80x2.5	28	14/14	50	2400	L
451613	100x100x60x2.5	27	13/14	50	2400	L
451616	100x100x80x2.5	36	18/18	50	2400	L
451619	100x100x100x2.5	46	23/23	50	2400	L

L = In stock, D = Direct delivery, 4 week delivery time.